

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
JEL 31205

Total Pages in this Submission  
3

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**COMMUNICATION TERMINAL APPARATUS AND  
RADIO RECEPTION METHOD**

and invented by:

**Kazuyuki MIYA and Satoshi IMAIZUMI**

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 36 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
JEL 31205

Total Pages in this Submission  
3

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal                      Number of Sheets 9
- b. ☐ Informal                      Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy)                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class                      ☐ Express Mail (Specify Label No.): \_\_\_\_\_

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
JEL 31205

Total Pages in this Submission  
3

## Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	7	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	6	- 3 =	3	x \$78.00	\$234.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$924.00

- ☒ A check in the amount of \$924.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 19-4375 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

James E. Ledbetter, Reg. No. 28,732  
Stevens, Davis, Miller & Mosher, LLP  
1615 L Street N.W., Suite 850  
P.O. Box 34387  
Washington, D.C. 20043-4387  
Telephone: 202/408-5100  
Facsimile: 202/408-5200

Dated: June 27, 2000

CC:

# **SPECIFICATION**

Title of the Invention :

COMMUNICATION TERMINAL APPARATUS AND  
RADIO RECEPTION METHOD

Inventor :

Kazuyuki MIYA  
Satoshi IMAIZUMI

COMMUNICATION TERMINAL APPARATUS  
AND RADIO RECEPTION METHOD  
BACKGROUND OF THE INVENTION

Field of the Invention

5       The present invention relates to a communication terminal apparatus and radio reception method in a digital radio communication system, and more particularly, to a communication terminal apparatus and radio reception method in a Direct Sequence-Code  
10 Division Multiple Access system in which forward transmission directional control is applied using a smart antenna and adaptive array antenna.

Description of the Related Art

Conventionally in the case where traffic channel  
15 signals and common control channel signals are transmitted with the same transmission method (both with omnidirectional), dedicated physical channel (traffic channel) signals are controlled with a very limit received level ( $E_b/N_0$  or SIR) providing a required  
20 quality by transmit power control to improve the spectral efficiency.

On the contrary, with respect to the common control channel signals, in order to enable all communication terminals in a service area to receive surrounding cell  
25 information for a handover, in other words, to enable all the communication terminals in the service area to ensure received qualities higher than a predetermined

level, the signals are generally transmitted to the terminals in the service area and around the service area with power higher than that of the traffic channel signals.

5        Accordingly in the above-mentioned case, in each of the communication terminals, a searcher, which selects a path of the traffic channel signals, in other words, which detects a timing for despreading processing, operates using as references the common control channel  
10 signals that have higher power levels than the traffic channel signals without using entire traffic channel signals, to perform the search with high reliability.

In a base station, the common control channel (for example, CCPCH: Common Control Physical CHannel) signals  
15 are usually transmitted with omnidirectional (omni or sector), and on the contrary, the traffic channel (DPCH: Dedicated Physical CHannel) signals are sometimes transmitted with directional control using a transmission radiation pattern. In this case, as  
20 illustrated in FIG.1, the base station transmits the traffic channel signals to communication terminal 1 with the omnidirectional. Accordingly communication terminal 1 receives all signals passed through path 1 on which the signals directly arrive at communication  
25 terminal 1 from base station 2, and paths 2 and 3 respectively on which the signals are reflected by obstacles 3 and 4, and arrive at communication terminal

1. Therefore a delay profile is as illustrated in FIG.1B.

On the contrary, in the case where transmission directional control is applied to the traffic channel signals, as illustrated in FIG.2A, transmission is performed with a radiation pattern indicated with X. In this case, since propagation paths are limited, communication terminal 1 receives signals passed through path 1 on which the signals directly arrive at communication terminal 1 from base station 2, and path 3 on which the signals are reflected by obstacle 4, and arrive at communication terminal 1 from base station 2, and does not receive the signals passed through path 2 on which the signals are reflected by obstacle 3, and arrive at communication terminal 1 from base station 2. Therefore the delay profile is as illustrated in FIG.2B.

Thus, since the directional controlled traffic channel limits propagation paths thereof, propagation paths are different between the traffic channel and the common control channel, and thereby delay profiles become different. In this case, as can be seen from FIGS.1B and 2B, path 2 that is not contained in the delay profile of the traffic channel is present in the delay profile of the common control channel. Therefore there is a problem that the searcher selects a wrong path when operates using the common control channel signals as references as described above.

On the other hand, when the searcher operates using the traffic channel signals as references, since the signals are controlled with the very limit received level providing the required quality by the transmit power control, the reliability of path selection is decreased.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a communication terminal apparatus and radio reception method capable of performing path selection accurately with high reliability even in the case where a base station performs directional controlled transmission.

It is a subject of the present invention that in a DS-CDMA system in which forward transmission directional control is applied using, for example, a smart antenna and adaptive array antenna, a communication terminal performs correlation calculation between a delay profile of a dedicated physical channel and a delay profile of a common control channel, and thereby performs path selection (finger selection) accurately with high reliability.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects and features of the invention will appear more fully hereinafter from a consideration of the following description taken in connection with the accompanying drawing wherein one example is illustrated by way of example, in which;

FIG.1A is a diagram to explain omnidirectional



transmission;

FIG.1B is a diagram illustrating a delay profile in the case illustrated in FIG.1A;

FIG.2A is a diagram to explain transmission under  
5 directional control;

FIG.2B is a diagram illustrating a delay profile in the case illustrated in FIG.2A;

FIG.3 is a block diagram illustrating a configuration of a communication terminal apparatus  
10 according to a first embodiment of the present invention;

FIG.4A is a diagram illustrating a delay profile to explain a radio reception method of the present invention;

FIG.4B is a diagram illustrating a delay profile  
15 to explain a radio reception method of the present invention;

FIG.4C is a diagram illustrating a delay profile to explain the radio reception method of the present invention;

FIG.5 is a block diagram illustrating a configuration of a communication terminal apparatus according to a second embodiment of the present invention;  
20

FIG.6 is a block diagram illustrating a configuration of a communication terminal apparatus according to a third embodiment of the present invention;  
25

FIG.7 is a block diagram illustrating a

configuration of a communication terminal apparatus according to a fourth embodiment of the present invention;

FIG.8 is a block diagram illustrating another configuration of the communication terminal apparatus according to the fourth embodiment of the present invention;

FIG.9A is a diagram to explain a common control channel; and

FIG.9B is another diagram to explain the common control channel.

#### DETAILED DESCRIPTION OF THE

#### PREFERRED EMBODIMENTS

Embodiments of the present invention will be described specifically below with reference to accompanying drawings.

(First embodiment)

FIG.3 is a block diagram illustrating a configuration of a communication terminal apparatus according to the first embodiment of the present invention. Herein it is assumed that dedicated physical channel (DPCH: traffic channel) signals are controlled with a transmission radiation pattern in a forward channel from a base station to a communication terminal. In addition only a reception side is described in the communication terminal apparatus illustrated in FIG.3.

A directional controlled signal transmitted from

the base station is received in radio reception circuit 102 through antenna 101. Radio reception circuit 102 performs amplification (gain control), downconverting, and A/D conversion on a received signal. A/D converted data is despread in matched filters 103 and 104 with respective spreading codes used in spreading in the base station. Herein, data of the traffic channel (DPCH) is despread in matched filter 103, and data of a common control channel (CCPCH) is despread in matched filter 104.

Two kinds of despread data are respectively output to demodulation circuits 105 and 106. In other words, a traffic channel signal, despread in matched filter 103, is output to demodulation circuit 105 to be demodulated, and a common control channel signal, despread in matched filter 104, is output to demodulation circuit 106 to be demodulated.

In demodulation circuit 105, sampling circuit 1051 samples such a sample that a high correlation value is obtained in the despread, in other words, a sample at a required timing. In addition, this timing is obtained in searcher 107 described later.

Channel estimation is performed on each sample in channel estimation circuit 1053 using a known reference signal (for example, pilot signal) contained in the signal. Based on the channel estimate, coherent detection is performed. In other words, with respect to

samples delayed in delay circuit 1052, channel estimates are multiplied in multiplier 1054.

RAKE combining circuit 1055 performs RAKE combining on coherent-detected samples. Combined data is output  
5 to decision circuit 1056, which performs bit decision. Thus received data is obtained. In addition, common control channel signals, output to demodulation circuit 106, are demodulated with the same processing as described above to obtain received data.

10 Two kinds of data despread in matched filters 103 and 104 are respectively output to received level measurement circuits 1071 and 1072 in searcher 107. In other words, the traffic channel signal despread in matched filter 103 is output to received level  
15 measurement circuit 1071, and the common control channel signal despread in matched filter 104 is output to received level measurement circuit 1072.

Values measured in received level measurement circuits 1071 and 1072 are respectively output to delay  
20 profile generation circuits 1073 and 1074. In other words, a received level measured value of the traffic channel signal is output to delay profile generation circuit, and a received level measured value of the common control channel is output to delay profile generation  
25 circuit 1074.

Delay profile generation circuits 1073 and 1074 generate respective delay profiles by integrating for

each reception timing. Obtained information is both output to correlation circuit 1075. Correlation circuit 1075 performs correlation calculation on the traffic channel signal and common control channel signal using the information on respective delay profiles.

A result of the correlation calculation is output to path selection circuit 1076 to perform a path selection (finger selection). A selection result is output to reception timing determination circuit 1077, where according to a path selection result, the reception timing is determined. The reception timing is output to sampling circuit 1051 in demodulation circuit 105 as the timing required for the above-mentioned sampling. The reception timing is further output to sampling circuit 1051 in demodulation circuit 106.

The following explains the operation of the path selection in the communication terminal apparatus with the above-mentioned configuration.

Data despread from the received signal is output to the received level measurement circuit in searcher 107. Received level measurement circuit 1071 receives the traffic channel signal despread in matched filter 103. Received level measurement circuit 1072 receives the common control channel signal despread in matched filter 104.

Received level measurement circuit 1071 performs received level (power) measurement using the input

despread traffic channel signal. Received level measurement circuit 1072 performs received level (power) measurement using the input despread common control channel signal. The received level measurement is, for example, obtained from a square sum of a quadrature component and an in-phase component in quadrature modulated data. Further the level may be obtained by adding quadrature components or in-phase components over a predetermined interval on the same phase, and then obtaining the square sum.

Thus measured received levels are respectively output from received level measurement circuits 1071 and 1072 to delay profile generation circuits 1073 and 1074. Delay profile generation circuit 1073 generates a delay profile as illustrated in FIG.4 using received levels of the traffic channel signals. Delay profile generation circuit 1074 generates a delay profile as illustrated in FIG.4B using received levels of the common control channel signals. It is assumed herein that in a forward traffic channel, paths are limited to paths a, b and c by the directional control in the base station.

In the forward traffic channel, signals are generally transmitted from the base station with the transmit power control so that the communication terminal is capable of keeping a very limit received level providing the required quality of a RAKE combined signal, whereby the received level per a path is extremely low.

For example, as illustrated in FIG.4A, respective received levels of paths a, b and c are sometimes equal to or slightly higher than a threshold 2 to maintain the required quality (the threshold used not to select signals with levels lower than the threshold, which are considered as noises). The received levels of paths a, b and c are not different so much from received levels of paths d and e of which signals are considered as noises. Therefore when the path selection is performed using the delay profile of the traffic channel, the reliability becomes low.

On the other hand, in a forward common control channel, signals are transmitted from the base station so that the communication terminal is capable of receiving the signals with relatively high received levels. Therefore respective received levels of paths a, b and c are higher than a threshold 1 that is higher than the threshold 2. At this point, since the forward common control channel signals are not controlled with the transmission radiation pattern, paths d and e appear which provide received levels exceeding the threshold 1 besides paths a, b and c that are limited in the traffic channel. Accordingly when the path selection is performed using the delay profile of the common control channel, there is caused a possibility that a wrong path is selected.

These kinds of information indicative of respective

delay profiles are output to correlation circuit 1075. Based on the respective delay profiles of the traffic channel and common control channel, correlation circuit 1075 performs the correlation calculation of averaged  
5 received levels for each reception timing, in other words, performs the correlation calculation between the delay profiles. As the correlation calculation, for each path, the received level in the traffic channel is multiplied by the received level in the common control channel.

10 When the correlation calculation is thus performed between the delay profiles of the traffic channel and common control channel, it is possible to reduce effects of the paths d and e having higher received levels other than the paths a, b and c limited in the traffic channel.  
15 That is, as illustrated in FIG.4C, with respect to the paths a, b and c limited in the traffic channel, the respective received levels become high. Meanwhile with respect to the paths d and e which are not limited in the traffic channel, but have high received levels in  
20 the delay profile of the common control channel, the respective received levels become low.

Such a correlation calculation result is output to path selection circuit 1076, where the path selection is performed. At this point, the paths a, b and c limited  
25 in the traffic channel are selected. In addition, in the path selection, the number of paths to be selected is not particularly limited. For example, it may be



possible to select all such paths that the correlation calculation result exceeds a predetermined threshold, or it may be possible to select a path with the highest correlation calculation result or a number of paths in descending order of correlation calculation result.

The path selection result indicative of the selected paths is output to reception timing determination circuit 1077, which determines respective timings for the paths a, b and c. Reception timing determination circuit 1077 outputs determined reception timings to sampling circuit 1051 in demodulation circuit 105 and a sampling circuit in demodulation circuit 106. Each sampling circuit performs demodulation according to input reception timings.

Thus, in the communication terminal apparatus according to this embodiment, the correlation calculation is performed between respective delay profiles of the traffic channel and common control channel, and thereby it is possible to reduce effects of paths with higher received levels other than paths limited in the traffic channel. As a result, even if the transmission directional control is applied to forward traffic channel signals, it is possible to perform the path selection accurately with high reliability.

(Second embodiment)

This embodiment explains a case that preliminary selection is performed for paths on which the correlation

calculation between the delay profiles is performed.

FIG.5 is a block diagram illustrating a configuration of a communication terminal apparatus according to the second embodiment of the present invention. In addition, in the communication terminal apparatus illustrated in FIG.5, the same sections as in the communication terminal apparatus illustrated in FIG.3 are given the same marks as in FIG.3 to omit specific explanations thereof.

10 In the communication terminal apparatus according to this embodiment, searcher 301 has received level measurement circuits 3011 and 3012 that measure received levels of despread data, delay profile generation circuits 3013 and 3014 that generate respective delay  
15 profiles of the channels based on respective measured results of the received levels, path candidate selection circuit 3015 that selects path candidates from the delay profile of the traffic channel, correlation circuit 3016 that calculates the correlation between selected path  
20 candidates of the traffic channel and paths of the delay profile of the common control channel, path selection circuit 3017 that selects a path from the correlation calculation result, and reception timing determination circuit 3018 that determines a reception timing from the  
25 path selection result.

The following explains the operation of the path selection in the communication terminal apparatus with

the above-mentioned configuration.

Data despread from the received signal is output to the received level measurement circuit in searcher 301. Received level measurement circuit 3011 receives  
5 the traffic channel signal despread in matched filter 103. Received level measurement circuit 3012 receives the common control channel signal despread in matched filter 104.

Received level measurement circuit 3011 performs  
10 received level measurement using the input despread traffic channel signal. Received level measurement circuit 3012 performs received level measurement using the input despread common control channel signal. The received level measurement is, for example, obtained  
15 from a square sum of a quadrature component and an in-phase component in quadrature modulated data.

The received level measured result of the traffic channel signal measured in received level measurement circuit 3011 is output to delay profile generation  
20 circuit 3013, where the delay profile of the traffic channel is generated. The received level measured result of the common control channel signal measured in received level measurement circuit 3012 is output to delay profile generation circuit 3014, where the delay  
25 profile of the common control channel is generated. In addition, with respect to the common control channel, it may be possible to generate a delay profile containing

only signals of timings selected by the path selection described later, not to generate the delay profile containing the signals of all the timings.

The information on the delay profile of the traffic  
5 channel is output to path candidate selection circuit 3015, where path candidates are selected. In the path candidate selection (preliminary selection), for example, two thresholds are provided. A path with a received level equal to or less than a lower threshold  
10 is not selected as a candidate. Another path with a received level equal to or more than a higher threshold is selected unconditionally, and the information thereon is output to path selection circuit 3017.

Then the other path with a received level less than  
15 the higher threshold and more than the lower threshold, in other words, a path of which the signal is difficult to discriminate from a noise (path with a received level higher than the threshold 2 and lower than the threshold 1 in FIG.4) is selected as a path candidate. The path  
20 candidate selection result is output to correlation circuit 3016.

The information on the delay profile of the common control channel is output to correlation circuit 3016. Correlation circuit 3016 performs correlation  
25 calculation between the path in the delay profile of the common control channel and the path selected as the path candidate output from path candidate selection circuit

3015. As the correlation calculation, for example, for each path, the multiplication of the received level in the traffic channel by that in the common control channel is calculated.

5           In the case where the correlation calculation is thus performed between the path candidate in the traffic channel and the path in the delay profile of the common control channel, when the path candidate is the path limited in the traffic channel, the received level of  
10 such a path becomes high.

          The result indicative of such a correlation calculation is output to path selection circuit 3017 in searcher 301, where the path selection is performed. At this point, the path selected based on the correlation  
15 calculation result and the path selected unconditionally in path candidate selection circuit 3015 are set as selected paths. In addition in the path selection, the number of paths to be selected is not limited in particular. For example, it may be possible to select  
20 all such paths that the correlation calculation result exceeds a predetermined threshold. Further it may be possible to add such an update algorithm on path selection that the path selected in this method is compared with a path conventionally selected (a path selected one  
25 update interval before), and only a certain number of paths (for example, only one path) are changed.

          The path selection result indicative of the

selected paths is output to reception timing determination circuit 3018, which determines respective timings for the selected paths. Reception timing determination circuit 3018 outputs the determined  
5 reception timings to sampling circuit 1051 in demodulation circuit 105 and the sampling circuit in demodulation circuit 106. Each sampling circuit performs demodulation processing according to the input reception timings.

10 Thus, in the communication terminal apparatus according to this embodiment, when the correlation calculation is performed between the preliminary selected path candidate of the traffic channel and the path of the delay profile of the common control channel,  
15 only the received level of the path limited in the traffic channel becomes high. Therefore even if the transmission directional control is applied to forward traffic channel signals, it is possible to perform the path selection accurately with high reliability. In  
20 this case, since the correlation calculation is not performed on all the paths of the traffic channel, it is possible to reduce the calculation amount, and to perform the path selection promptly. Further it is thereby possible to reduce a processing load on the  
25 apparatus. Furthermore, with respect to the delay profile of the common control channel, it is possible to reduce the calculation amount by generating the delay

path profile containing only the paths preliminary selected in the traffic channel.

(Third embodiment)

In the second embodiment, it is assumed that a  
5 channel on which the path candidate selection is performed is the traffic channel. However, there is considered a condition that the traffic channel is not appropriate as a channel on which the path candidate selection is performed. For example, in the case where  
10 a received signal in the traffic channel has a low SIR due to the transmit power control, or the received level per one path is extremely low due to a large number of multipaths, it is difficult to perform the preliminarily selection with high reliability. Therefore this  
15 embodiment explains a case that a channel on which the path preliminary selection is performed is switched.

FIG.6 is a block diagram illustrating a configuration of a communication terminal apparatus according to the third embodiment of the present  
20 invention. In addition, in the communication terminal apparatus illustrated in FIG.6, the same sections as in the communication terminal apparatus illustrated in FIG.3 are given the same marks as in FIG.3 to omit specific explanations thereof.

25 In the communication terminal apparatus according to this embodiment, searcher 401 has received level measurement circuits 4011 and 4012 that measure received

levels of despread data, delay profile generation circuits 4015 to 4017 that generate delay profiles based on measured results of the received levels, path candidate selection circuit 4018 that selects path  
5 candidates from the received level measured results on each channel, correlation circuit 4013 that calculates the correlation between a path in a channel on which the path candidate selection is performed and a path of a delay profile of another channel, path selection circuit  
10 4019 that selects a path from the correlation calculation result, reception timing determination circuit 4020 that determines a reception timing from the path selection result, and switch 4014 that switches a channel on which the path candidate selection is performed.

15       The following explains the operation of the path selection in the communication terminal apparatus with the above-mentioned configuration.

      Data despread from the received signal is output to the received level measurement circuit in searcher  
20 401. Received level measurement circuit 4011 receives the traffic channel signal despread in matched filter 103. Received level measurement circuit 4012 receives the common control channel signal despread in matched filter 104.

25       Received level measurement circuit 4011 performs received level measurement using the input despread traffic channel signal. Received level measurement



circuit 4012 performs received level measurement using the input despread common control channel signal. The received level measurement is, for example, obtained from a square sum of a quadrature component and an in-phase component in quadrature modulated data.

When the path candidate selection is performed on the traffic channel, the received level of the traffic channel signal measured in received level measurement circuit 4011 is output to delay profile generation circuit 4015, where the delay profile is generated based on the received level. The information on the delay profile is output to path candidate selection circuit 4018 to select path candidates.

On the other hand, when the path candidate selection is performed on the common control channel, the received level of the common control channel signal measured in received level measurement circuit 4012 is output to delay profile generation circuit 4015, where the delay profile is generated based on the received level. The information on the delay profile is output to path candidate selection circuit 4018 to select path candidates. The path candidate selection is performed by switching a channel as appropriate with switch 4014. When the path candidate selection is performed on either channel, it is possible to set the channel as appropriate based on, for example, received qualities of both channels such as SIR and the number of path candidates.

In addition, with respect to the channel on which the path candidate selection is performed, it may be possible to generate a delay profile containing only signals of timings selected by the path selection, not  
5 to generate the delay profile containing the signals of all the timings.

For example, received level measurement circuits 4011 and 4012 measure SIR, and switching of switch 4014 is controlled in such a way as to perform the path  
10 candidate selection on a channel with a lower SIR value. When the switching of switch 4014 is performed with the number of path candidates, the switching of switch 4014 is controlled in such a way as to perform the path candidate selection on a channel with the more number  
15 of path candidates in path candidate selection circuit 4018.

In addition the path candidate selection method is the same as in the second embodiment.

With respect to received levels in the channel on  
20 which the path candidate selection is not performed, those in the traffic channel are output to delay profile generation circuit 4016, where the delay profile is generated based on the received levels. Received levels in the common control channel are output to delay profile  
25 generation circuit 4017, where the delay profile is generated based on the received levels. The information on these delay profiles is output to correlation circuit

4013. Correlation circuit 4013 performs the correlation calculation between the path in the delay profile and the path selected by the path candidate selection output from path candidate selection circuit 4018. As the  
5 correlation calculation, for example, for each path, the multiplication of the received level in the traffic channel by that in the common control channel is calculated.

In the case where the correlation calculation is  
10 thus performed between the path candidate and the path in the delay profile, when the path candidate is the path limited in the traffic channel, the received level of such a path becomes high.

The result indicative of such a correlation  
15 calculation is output to path selection circuit 4019, where the path selection is performed. At this point, the path selected based on the correlation calculation result and the path selected unconditionally in path candidate selection circuit 4018 are set as selected  
20 paths. In addition in the path selection, the number of paths to be selected is not limited in particular. For example, it may be possible to select all such paths that the correlation calculation result exceeds a predetermined threshold. Further it may be possible to  
25 add such an update algorithm on path selection that the path selected in this method is compared with a path conventionally selected (a path selected one update

interval before), and only a certain number of paths (for example, only one path) are changed.

The path selection result indicative of the selected paths is output to reception timing  
5 determination circuit 4020, which determines respective timings for the selected paths. Reception timing determination circuit 4020 outputs the determined reception timings to sampling circuit 1051 in demodulation circuit 105 and the sampling circuit in  
10 demodulation circuit 106. Each sampling circuit performs demodulation processing according to the input reception timings.

Thus, in the communication terminal apparatus according to this embodiment, when the correlation  
15 calculation is performed between the preliminary selected path candidate of the traffic channel and the path of the delay profile of the common control channel, only the received level of the path limited in the traffic channel. Therefore even if the transmission directional  
20 control is applied to forward traffic channel signals, it is possible to perform the path selection accurately with high reliability. In this case, it is possible to switch the channel on which the path candidate selection is performed, as appropriate corresponding to  
25 communication environment or others, enabling the path selection to be performed with higher reliability.

(Fourth embodiment)

While the first to third embodiments describe the case that the correlation calculation is always performed, there is considered another case that a base station does not perform transmission directional control, for example, when communication is started, or synchronization acquisition is performed again due to synchronization shift. In this case, it is preferable to perform ordinary path selection. Therefore this embodiment describes a case of switching a searcher that performs the correlation calculation corresponding to the presence or absence of the transmission directional control and an ordinary searcher.

FIG.7 is a block diagram illustrating a configuration of a communication terminal apparatus according to the fourth embodiment of the present invention. In addition, in the communication terminal apparatus illustrated in FIG.7, the same sections as in the communication terminal apparatus illustrated in FIG.3 are given the same marks as in FIG.3 to omit specific explanations thereof.

The communication terminal apparatus according to this embodiment comprises searcher 107 that has received level measurement circuits 1071 and 1072 that measure received levels of despread data, delay profile generation circuits 1073 and 1074 that generate delay profiles based on the received levels, correlation circuit 1075 that calculates the correlation between

paths of the delay profiles, path selection circuit 1076 that selects a path from the correlation calculation result, and reception timing determination circuit 1077 that determines a reception timing from the path  
5 selection result, and searcher 501 that has received level measurement circuit 5011 that measures a received level of despread data, delay profile generation circuits 5012 that generates a delay profile based on the received level, path selection circuit 5013 that  
10 selects a path from the delay profile, and reception timing determination circuit 5014 that determines a reception timing from the path selection result.

Further the communication terminal apparatus according to this embodiment has switch 502 that controls  
15 an input of the despread data of the traffic channel to searcher 107, and switch 503 that controls an input of the despread data of the common control channel to searcher 501.

The following explains the operation of the path  
20 selection in the communication terminal apparatus with the above-mentioned configuration.

When communication is started or synchronization acquisition is performed again due to synchronization shift, switch 503 is switched so that searcher 501  
25 operates. Switch 502 is switched not to output the despread data to searcher 107.

Data despread from the received common control

channel signal is output to received level measurement circuit 5011 in searcher 501. Received level measurement circuit 5011 performs received level measurement using the common control channel signal.

5 This value measured in received level measurement circuit 5011 is output to delay profile generation circuit 5012. Delay profile generation circuit 5012 generates the delay profile of the common control channel based on the received level measured value.

10 The information on the delay profile is output to path selection circuit 5013, where the path selection is performed using the information on the delay profile. The path selection result is output to reception timing determination circuit 5014, where the reception timing  
15 is determined using the path selection result. The determined reception timing is output to sampling circuits 1051 in demodulation circuits 105 and 106 to be used as a timing for demodulation processing.

On the other hand, when the base station performs  
20 the transmission directional control, switch 503 is switched so that searcher 107 operates. Further switch 502 is switched to output the despread data to searcher 107. The path selection operation in this case is the same as in the first embodiment. In addition information  
25 on "ON/OFF" of the transmission directional control is notified to communication terminals, for example, using control signals of the common control channel and traffic

channel. FIG.7 illustrates a configuration in which such information is broadcast using the common control channel, and using a signal indicative of the information, the switches are switched.

5           Thus the operations of the searchers are switched corresponding to "ON/OFF" of the transmission directional control, whereby it is possible to perform correct path selection adaptively while following the control of the base station.

10           Further while searchers 107 and 501 are both provided in the above-mentioned configuration, as illustrated in FIG.8, provision of switches 601 and 602 enables delay profile generation circuit 1074 to be shared as delay profile generation circuits 1074 and 5012  
15 in FIG.7.

          In the above-mentioned first to fourth embodiments, as illustrated in FIG.9A, the common control channel (CCPCH) may be a channel in which a known reference signal (for example, pilot signal) 702 is intermittently  
20 inserted, for example, a perch channel, or as illustrated in FIG.9B, may have a configuration in which a channel for the known reference signal, for example, pilot channel 703, and data channel 704 are code-multiplexed.

          The present invention is not limited to the  
25 above-mentioned first to fourth embodiments, and it may be possible to perform various modifications to practice. For example, it may be possible to set to independently



control respective time constants of respective delay profiles of the traffic channel and common control channel, for example, integration times in generating the delay profile or filtering coefficients in filtering  
5 with an IIR filter.

Further while the above-mentioned first to fourth embodiments describe the case of generating the delay profile using the common control channel (common physical channel for the purpose of common control), the  
10 present invention may be applicable to a case of generating the delay profile using the common physical channel since the common control channel is one aspect of the common physical channel.

Furthermore while the above-mentioned first to  
15 fourth embodiments describe the case of using, as the common control channel, CCPCH (Common Control Physical CHannel including Primary-CCPCH and Secondary-CCPCH in W-CDMA), the present invention may be applicable to a case of using, as the common control channel, CPICH  
20 (Common Pilot CHannel), and the CCPCH may include a plurality of physical channels.

Furthermore it may be possible to combine the above-mentioned first to fourth embodiments as appropriate to practice.

25 The communication terminal apparatus of the present invention adopts a configuration having a measurement section that measures respective received levels of

respective despread signals of the common control channel and the transmission directional controlled dedicated physical channel at respective reception timings, a delay profile generation section that  
5 generates respective delay profiles based on respective measured results, a calculation section that performs correlation calculation between a received level in the dedicated physical channel and another received level in the common control channel, and a determination  
10 section that selects a path from a result of the correlation calculation to determine a reception timing of the path.

According to this configuration, in the case where forward transmission directional control is applied  
15 using, for example, a smart antenna and adaptive array antenna, since the communication terminal apparatus performs the correlation calculation between a delay profile of the dedicated physical channel and a delay profile of the common control channel, it is possible  
20 to perform path selection (finger selection) accurately with high reliability corresponding to the transmission directionality provided on the traffic channel.

The communication terminal apparatus of the present invention adopts a configuration having a measurement  
25 section that measures respective received levels of respective despread signals of the common control channel and the transmission directional controlled

dedicated physical channel at respective reception timings, a delay profile generation section that generates respective delay profiles based on respective measured results, a preliminary selection section that  
5 selects a path candidate at a reception timing of one channel, a calculation section that performs correlation calculation between a received level in a selected path candidate and another received level in another channel, and a determination section that selects a path from a  
10 result of the correlation calculation to determine a reception timing of the path.

According to this configuration, since the path candidate at the reception timing of one channel is selected preliminarily, it is possible to decrease a  
15 calculation amount of received level measurement on another channel and a calculation amount of the correlation calculation between both channel signals, and therefore to reduce a processing load on the apparatus.

20 The communication terminal apparatus of the present invention adopts a configuration having a first searcher including a measurement section that measures respective received levels of respective despread signals of the common control channel and the transmission directional  
25 controlled dedicated physical channel at respective reception timings, a delay profile generation section that generates respective delay profiles based on

respective measured results, a calculation section that performs correlation calculation between a received level in the dedicated physical channel and another received level in the common control channel, and a  
5 determination section that selects a path from a result of the correlation calculation to determine a reception timing of the path, a second searcher including a measurement section that measures a received level of a despread signal of the common control channel, a delay  
10 profile generation section that generates a delay profile based on a measured result, and a determination section that selects a path using the received level of the common control channel to determine a reception timing of the path, and a second switch that switches  
15 the first searcher and the second searcher corresponding to the presence or absence of the transmission directional control.

According to this configuration, it is possible to perform accurate path selection adaptively while  
20 following the control of a base station, by switching between operations of the searchers.

The communication terminal apparatus of the present invention adopts a configuration having a first searcher including a measurement section that measures respective  
25 received levels of respective despread signals of the common control channel and the transmission directional controlled dedicated physical channel at respective

reception timings, a delay profile generation section that generates respective delay profiles based on respective measured results, a preliminary selection section that selects a path candidate at a reception  
5 timing of one channel, a calculation section that performs correlation calculation between a received level of a selected path candidate and another received level in another channel, and a determination section that selects a path from a result of the correlation  
10 calculation to determine a reception timing of the path, a second searcher including a measurement section that measures a received level of a despread signal of the common control channel, a delay profile generation section that generates a delay profile based on a measured  
15 result, and a determination section that selects a path using the received level of the common control channel to determine a reception timing of the path, and a second switch that switches the first searcher and the second searcher corresponding to the presence or absence of the  
20 transmission directional control.

According to this configuration, it is possible to perform accurate path selection adaptively while following the control of a base station, by switching between operations of the searchers. Further since the  
25 path candidate at the reception timing of one channel is selected preliminarily, it is possible to decrease a calculation amount of received level measurement on

another channel and a calculation amount of the correlation calculation between both channel signals, and therefore to reduce a processing load on the apparatus.

5           Furthermore in the present invention, it is preferable to provide the apparatus with a first switch that switches a channel on which a path candidate is selected.

10           According to this constitution, since it is possible to switch a channel on which the path candidate selection is performed as appropriate corresponding to, for example, communication environment, it is possible to perform the path selection with higher reliability.

15           A radio reception method of the present invention has the measurement step of measuring respective received levels of respective despread signals of the common control channel and the transmission directional controlled dedicated physical channel at respective reception timings, the delay profile generation step of  
20           generating respective delay profiles based on respective measured results, the calculation step of performing correlation calculation between a received level in the dedicated physical channel and another received level in the common control channel, and the determination step  
25           of selecting a path from a result of the correlation calculation to determine a reception timing of the path.

          According to this configuration, in the case where

forward transmission directional control is applied using, for example, a smart antenna and adaptive array antenna, since the communication terminal apparatus performs the correlation calculation between a delay  
5 profile of the dedicated physical channel and a delay profile of the common control channel, it is possible to perform path selection (finger selection) accurately with high reliability corresponding to the transmission directionality provided on the dedicated physical  
10 channel.

The radio reception method of the present invention has the measurement step of measuring respective received levels of respective despread signals of the common control channel and the transmission controlled  
15 dedicated physical channel at respective reception timings, the delay profile generation step of generating respective delay profiles based on respective measured results, the preliminary selection step of selecting a path candidate at a reception timing of one channel, the  
20 calculation step of performing correlation calculation between a received level of a selected path candidate and another received level in another channel, and the determination step of selecting a path from a result of the correlation calculation to determine a reception  
25 timing of the path.

According to this configuration, since the path candidate at the reception timing of one channel is

selected preliminarily, it is possible to decrease a calculation amount in the correlation calculation, and therefore to reduce a processing load on the apparatus.

As described above, in the communication terminal  
5 apparatus and radio reception method of the present invention, in the case where forward transmission directional control is applied using, for example, a smart antenna and adaptive array antenna, since the communication terminal apparatus performs the  
10 correlation calculation between a delay profile of the traffic channel and a delay profile of the common control channel, it is possible to perform path selection (finger selection) accurately with high reliability corresponding to the transmission directionality  
15 provided on the traffic channel.

The present invention is not limited to the above described embodiments, and various variations and modifications may be possible without departing from the scope of the present invention.

20 This application is based on the Japanese Patent Application No. HEI11-189093 filed on July 2, 1999, entire content of which is expressly incorporated by reference herein.



What is claimed is:

1. A communication terminal apparatus comprising:

measurement means for measuring respective  
5 received levels of respective despread signals of a  
common control channel and a transmission directional  
controlled dedicated physical channel at respective  
reception timings;

delay profile generation means for generating  
10 respective delay profiles based on respective measured  
results;

calculation means for performing correlation  
calculation between a received level in the dedicated  
physical channel and another received level in the common  
15 control channel; and

determination means for selecting a path from a  
result of the correlation calculation to determine a  
reception timing of the path.

2. A communication terminal apparatus  
20 comprising:

measurement means for measuring respective  
received levels of respective despread signals of a  
common control channel and a transmission directional  
controlled dedicated physical channel at respective  
25 reception timings;

delay profile generation means for generating  
respective delay profiles based on respective measured

results;

preliminary selection means for selecting a path candidate at a reception timing of one channel;

calculation means for performing correlation  
5 calculation between a received level of a selected path candidate and another received level in another channel; and

determination means for selecting a path from a result of the correlation calculation to determine a  
10 reception timing of the path.

3. A communication terminal apparatus comprising:

a first searcher having:

measurement means for measuring respective  
15 received levels of respective despread signals of a common control channel and a transmission directional controlled dedicated physical channel at respective reception timings;

delay profile generation means for generating  
20 respective delay profiles based on respective measured results;

calculation means for performing correlation calculation between a received level in the dedicated physical channel and another received level in the common  
25 control channel; and

determination means for selecting a path from a result of the correlation calculation to determine a

reception timing of the path;

a second searcher having:

measurement means for measuring a received level of a despread signal of the common control channel;

5 delay profile generation means for generating a delay profile based on a measured result; and

determination means for selecting a path using the received level of the common control channel to determine a reception timing of the path, and

10 a second switch that switches the first searcher and the second searcher corresponding to presence or absence of transmission directional control.

4. A communication terminal apparatus comprising:

15 a first searcher having:

measurement means for measuring respective received levels of respective despread signals of a common control channel and a transmission directional controlled dedicated physical channel at respective  
20 reception timings;

delay profile generation means for generating respective delay profiles based on respective measured results;

25 preliminary selection means for selecting a path candidate at a reception timing of one channel;

calculation means for performing correlation calculation between a received level of a selected path

candidate and another received level in another channel;  
and

determination means for selecting a path from  
a result of the correlation calculation to determine a  
5 reception timing of the path;

a second searcher having:

measurement means for measuring a received  
level of a despread signal of the common control channel;

delay profile generation means for generating  
10 a delay profile based on a measured result; and

determination means for selecting a path  
using the received level of the common control channel  
to determine a reception timing of the path, and

a second switch that switches the first searcher  
15 and the second searcher corresponding to presence or  
absence of transmission directional control.

5. The communication terminal apparatus  
according to claim 2, further comprising:

a first searcher that switches a channel on which  
20 the path candidate is selected.

6. A radio reception method comprising:

the measurement step of measuring respective  
received levels of respective despread signals of a  
common control channel and a transmission directional  
25 controlled dedicated physical channel at respective  
reception timings;

the delay profile generation step of generating

respective delay profiles based on respective measured results;

the calculation step of performing correlation calculation between a received level in the dedicated  
5 physical channel and another received level in the common control channel; and

the determination step of selecting a path from a result of the correlation calculation to determine a reception timing of the path.

10 7. A radio reception method comprising:

the measurement step of measuring respective received levels of respective despread signals of a common control channel and a transmission directional controlled dedicated physical channel at respective  
15 reception timings;

the delay profile generation step of generating respective delay profiles based on respective measured results;

the preliminary selection step of selecting a path  
20 candidate at a reception timing of one channel;

the calculation step of performing correlation calculation between a received level of a selected path candidate and another received level in another channel; and

25 the determination step of selecting a path from a result of the correlation calculation to determine a reception timing of the path.

## ABSTRACT OF THE DISCLOSURE

Received level measurement circuit 1071 performs received level measurement using input despread traffic channel data. Received level measurement circuit 1072  
5 performs received level measurement using input despread common control channel data. These received levels are respectively output from received level measurement circuits 1071 and 1072 to correlation circuit 1075. Correlation circuit 175 first performs correlation  
10 calculation between paths in respective profiles of the traffic channel and common control channel each generated based on respective received level. Based on the result of the correlation calculation, path selection is performed to determine a reception timing.

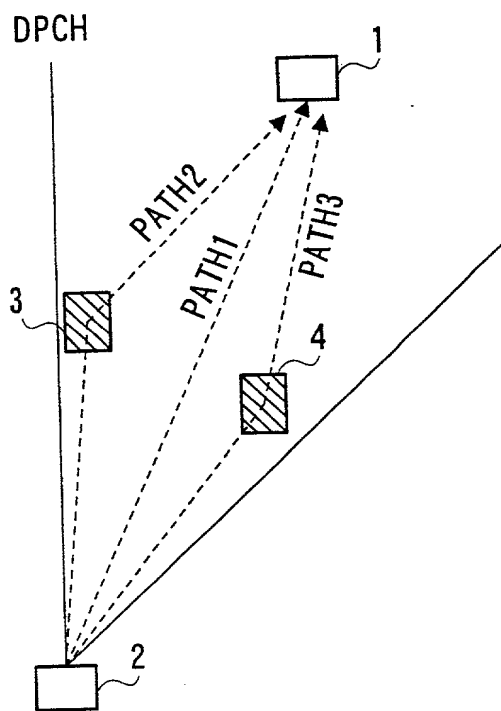


FIG. 1A




FIG. 1B

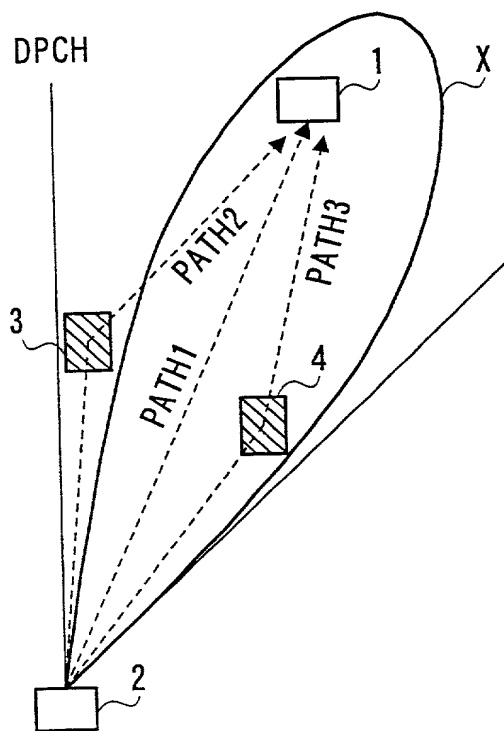


FIG. 2A




FIG. 2B



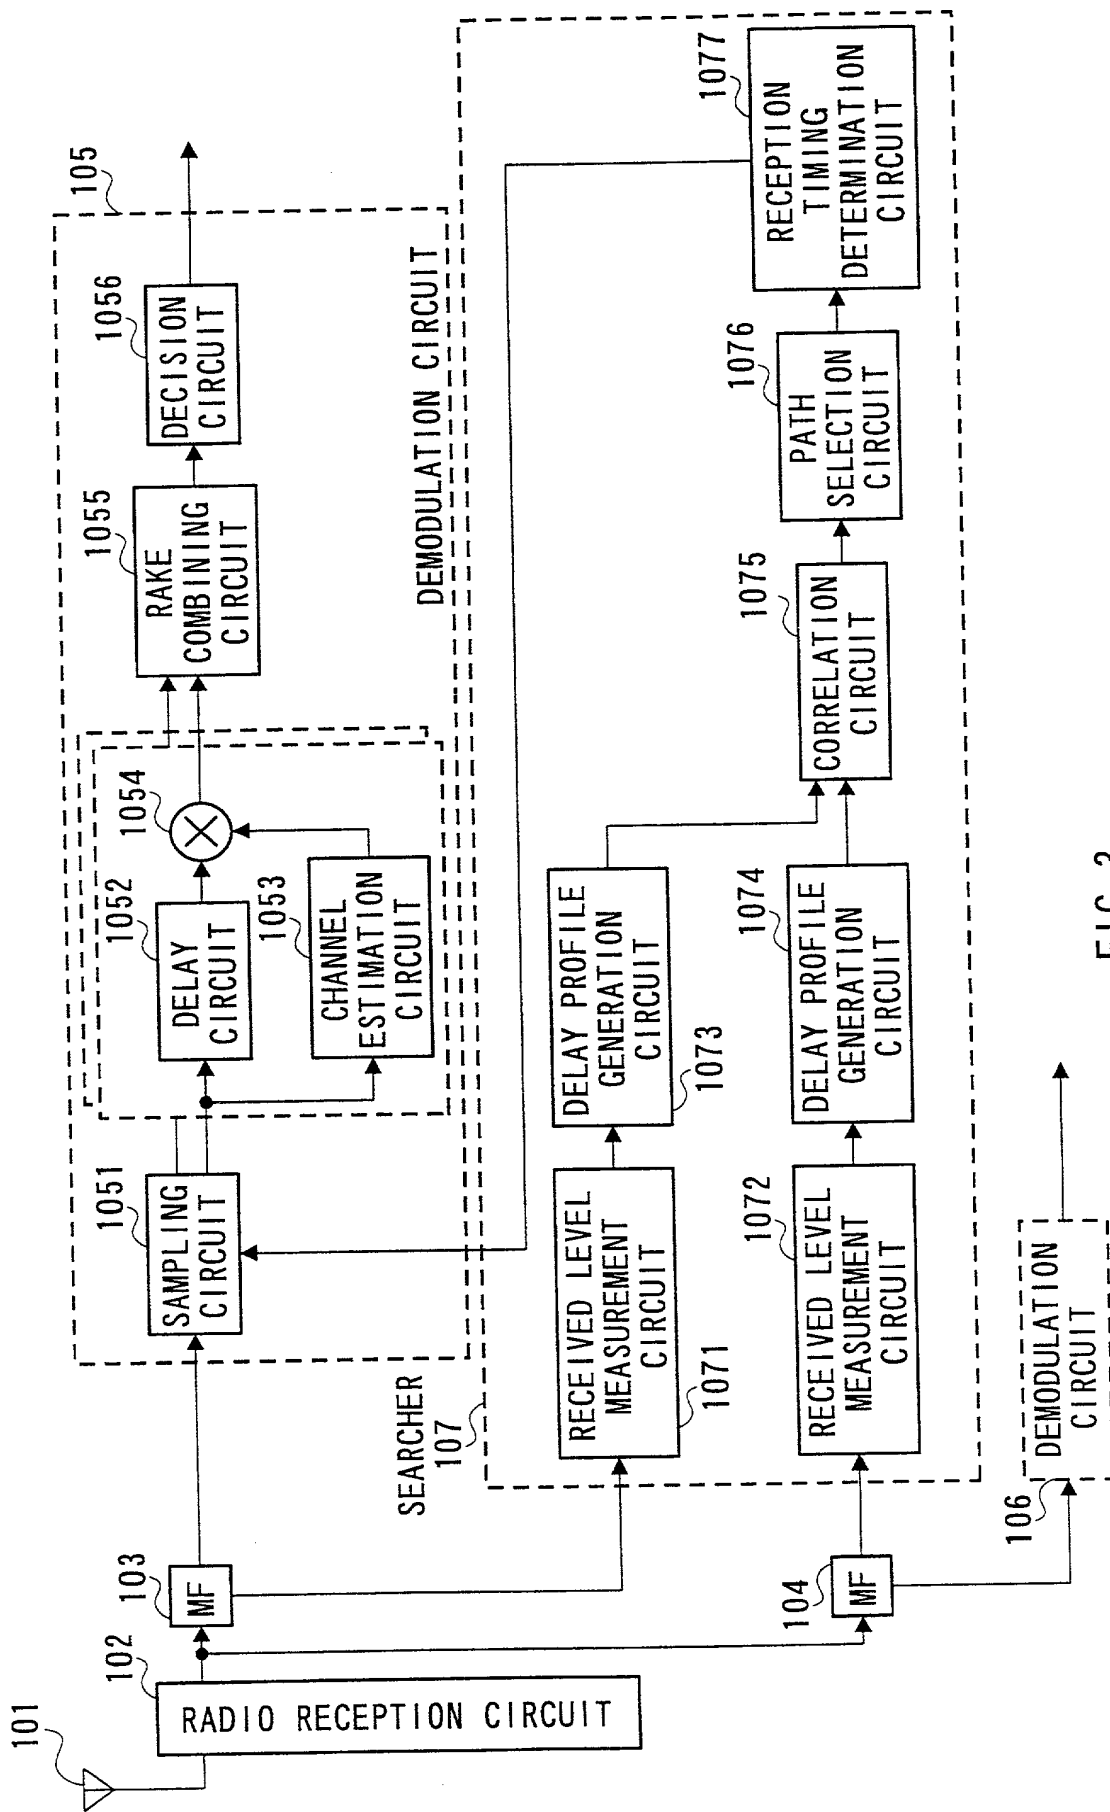


FIG. 3

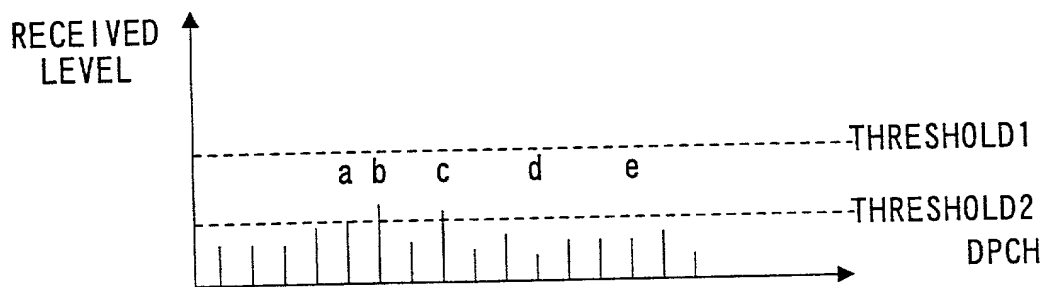


FIG. 4A

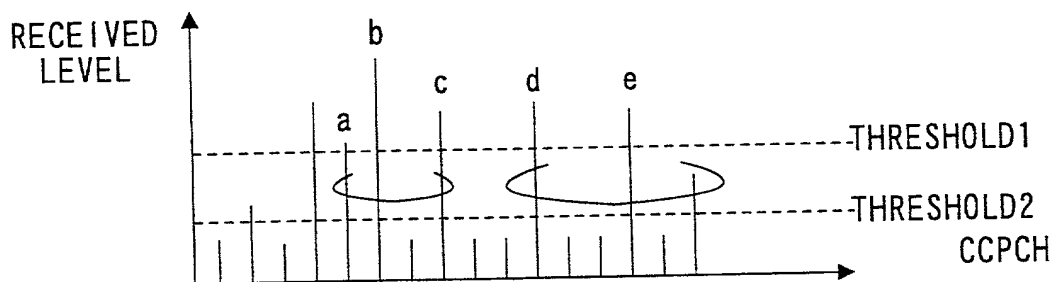


FIG. 4B

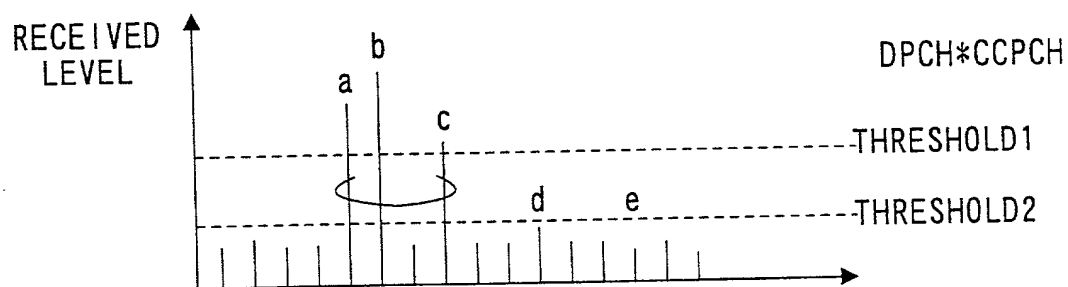


FIG. 4C

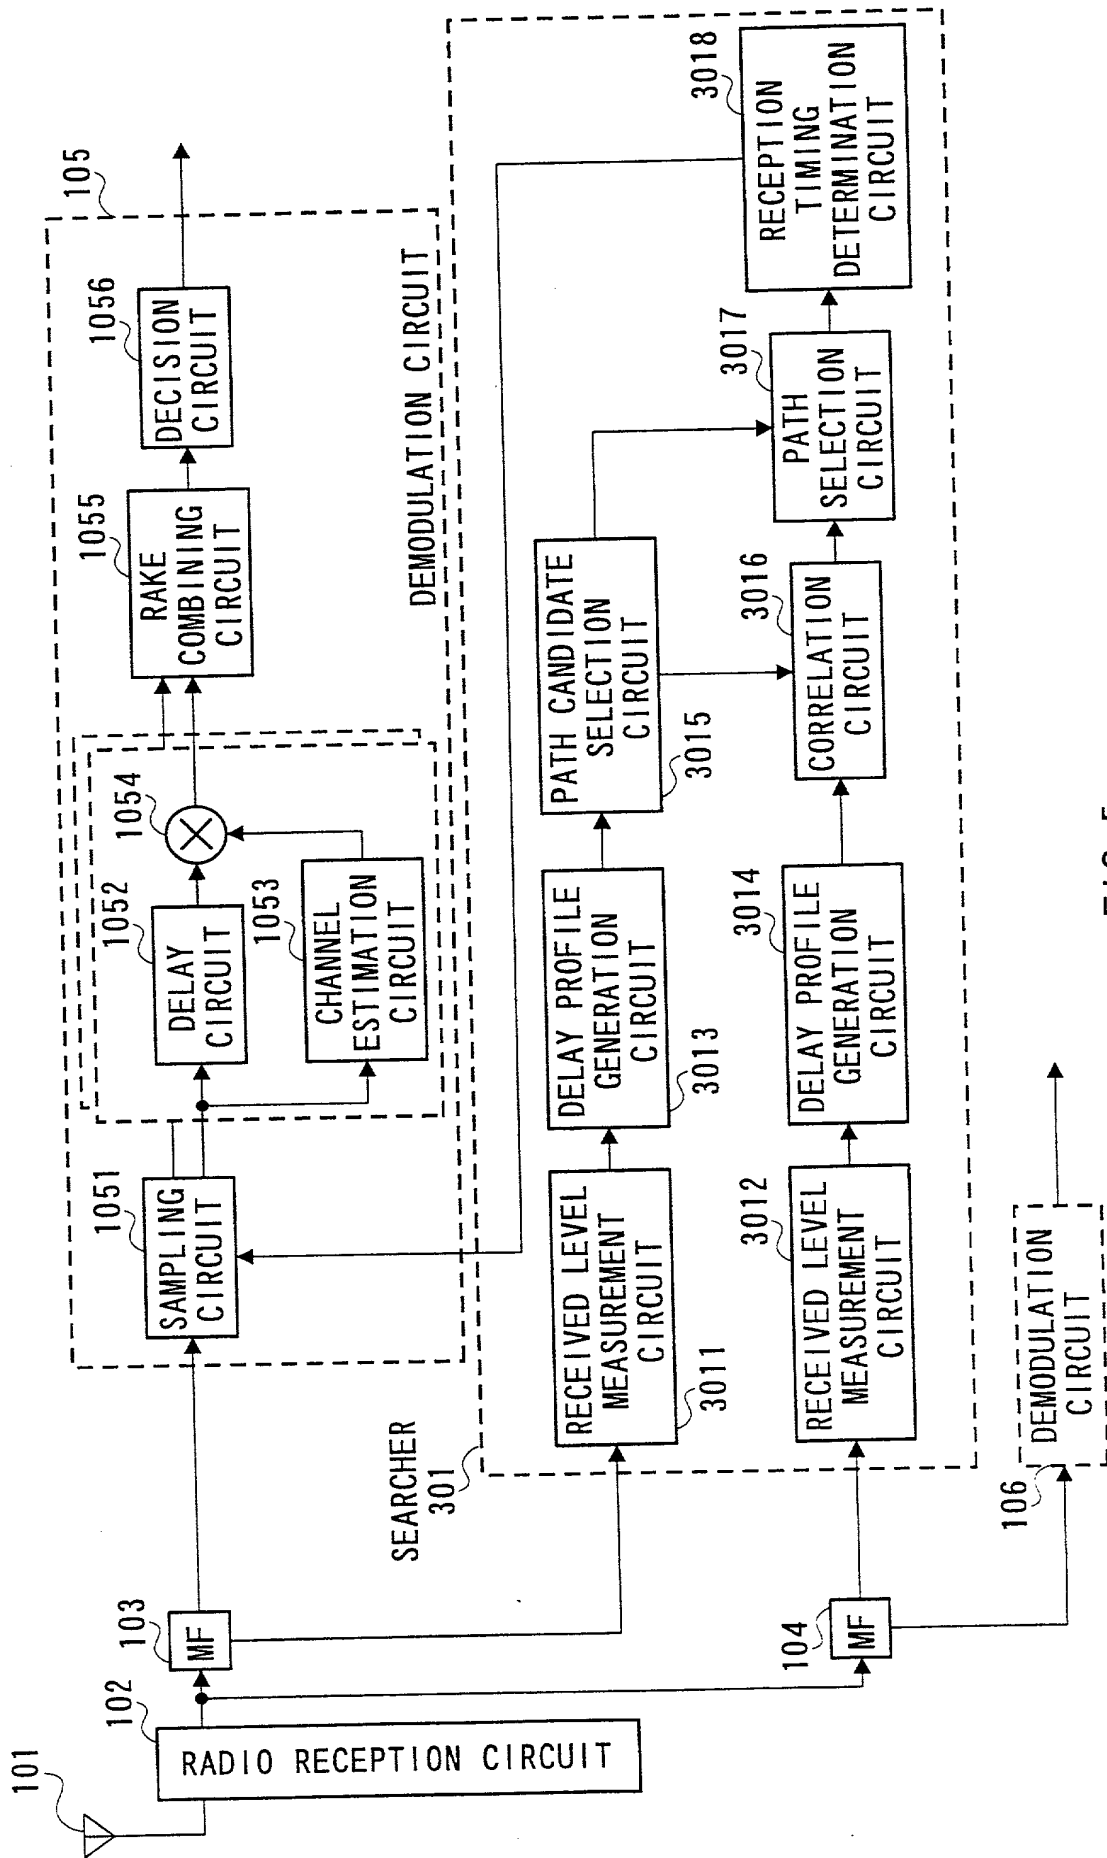


FIG. 5

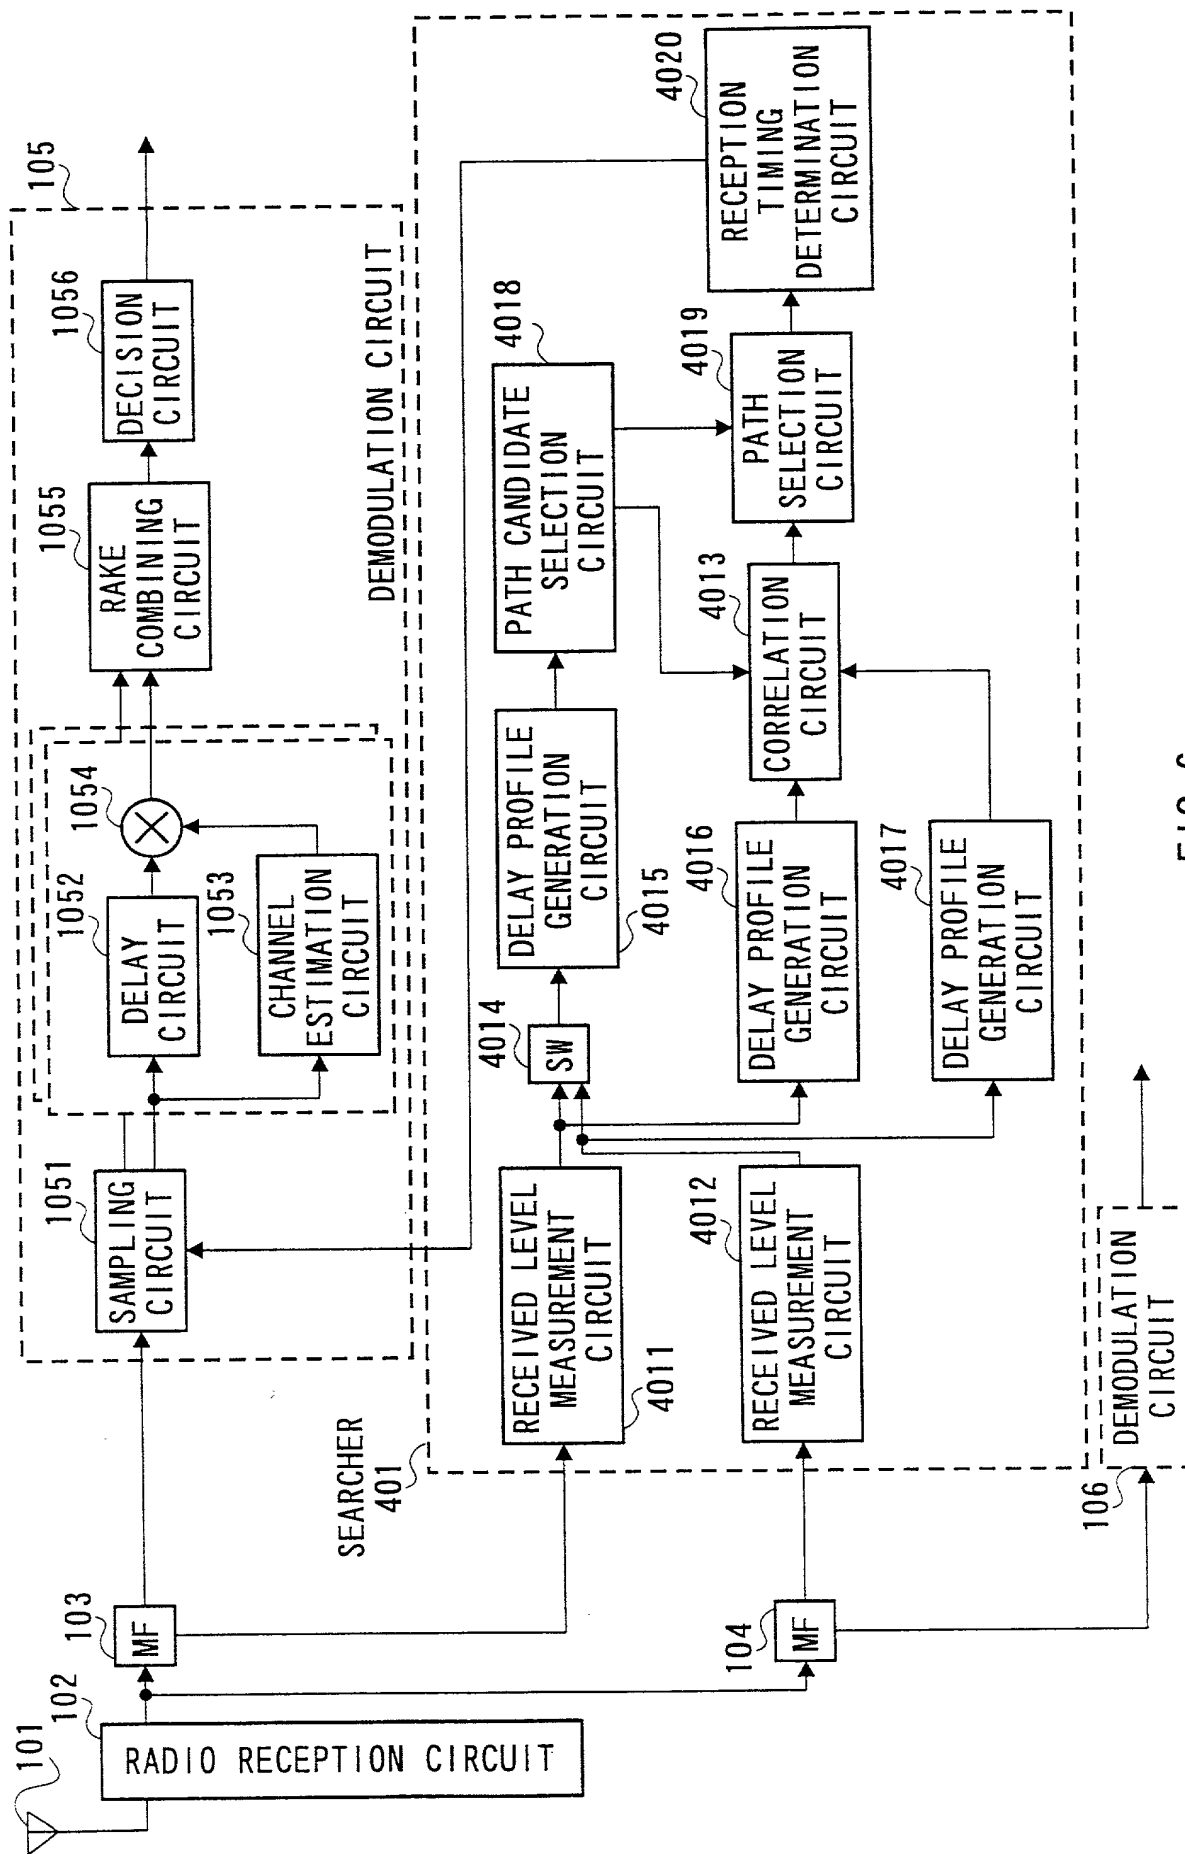


FIG. 6

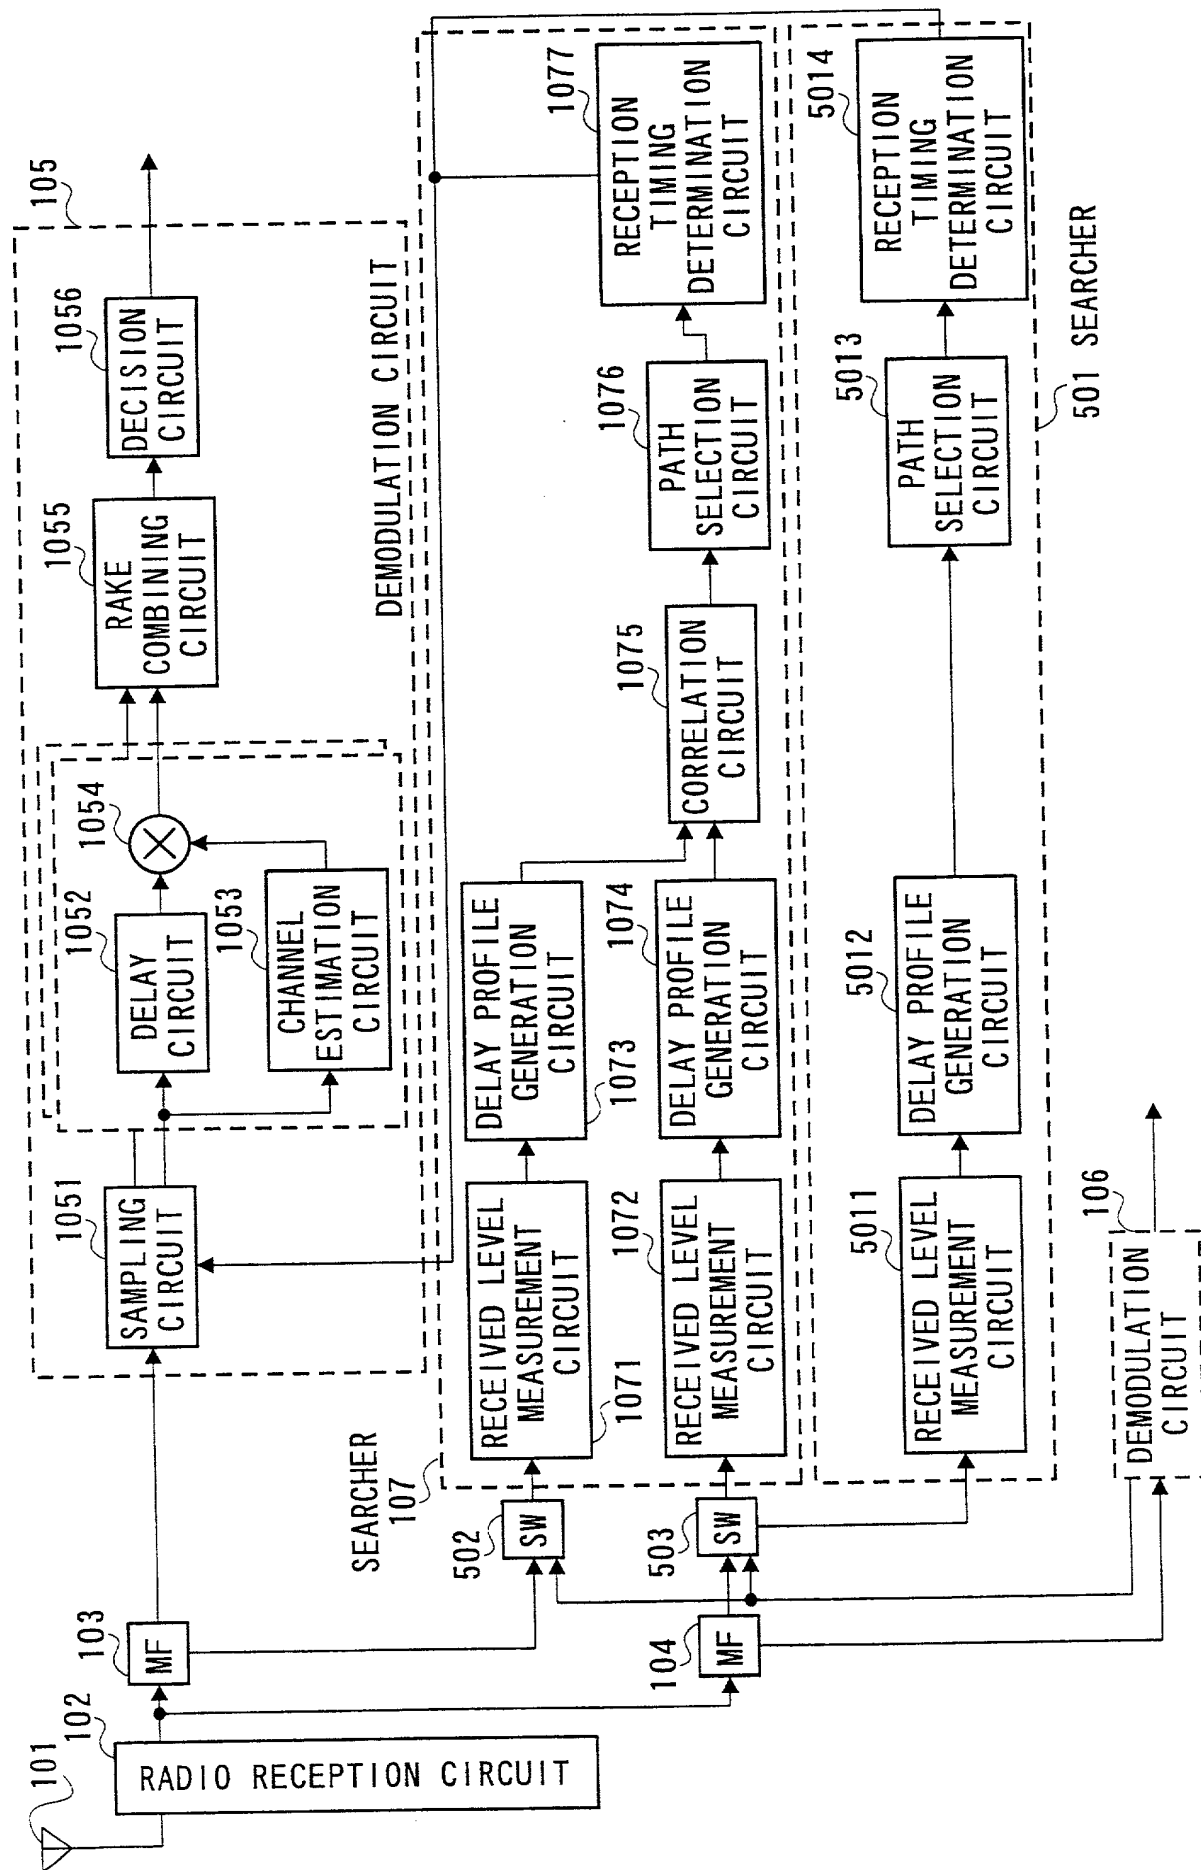


FIG. 7



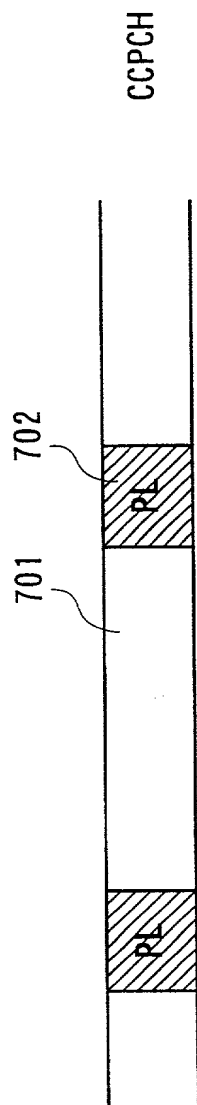


FIG. 9A

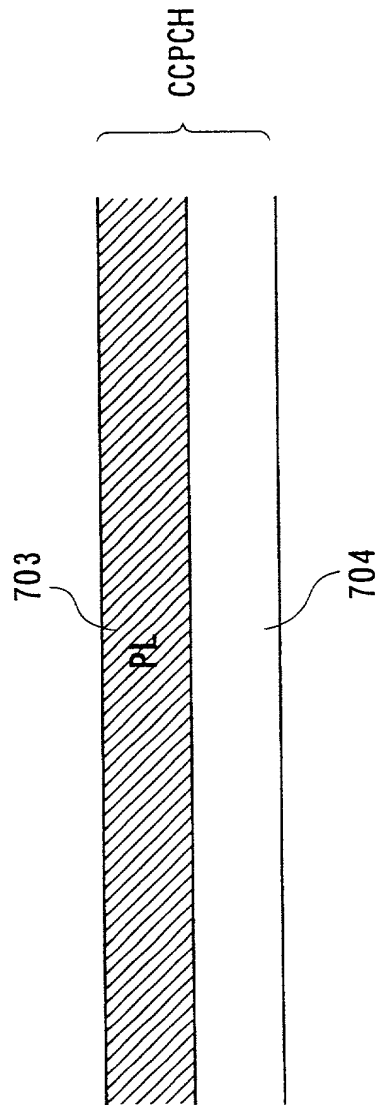


FIG. 9B

**APPLICATION FOR UNITED STATES PATENT  
Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: COMMUNICATION TERMINAL APPARATUS AND RADIO RECEPTION METHOD

the specification of which 2 (file no. \_\_\_\_\_ )

(check at least one) 3 ☒ is attached hereto

4 ☐ was filed on \_\_\_\_\_ as (5) U.S. Application Serial No. \_\_\_\_\_

6 ☐ and was amended \_\_\_\_\_  
(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input type="checkbox"/>	was filed as PCT international application
	8	Number _____
	9	on _____
	10	and was amended under PCT Article(s) 19 and/or 34 on _____ (if applicable).
	11	priority date claimed in PCT International Application _____ (Country) (Number) (Day/Month/Year Filed)

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119 Priority Claimed

12a	<u>JAPAN</u> (Country)	<u>JP11-189093</u> (Number)	<u>2/July/1999</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
	_____ (Country)	_____ (Number)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

12b	_____ Application No.	_____ Day/Month/Year Filed	_____ Application No.	_____ Day/Month/Year Filed
-----	--------------------------	-------------------------------	--------------------------	-------------------------------

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application	I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.		
	13 _____ (U.S. Application Number)	_____ (U.S. Filing Date)	_____ Status (patented, pending, abandoned)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO  
STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036,  
TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines



**STEVENS, DAVIS, MILLER & MOSHER, L.L.P.**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

**PAGE 2 OF U.S.A. DECLARATION FORM**

14a	Typewritten Full Name of Sole or First Inventor	<u>Kazuyuki</u>	<u>MIYA</u>
		Given Name	Middle Name Family Name
15a	Inventor's Signature	<u>Kazuyuki</u>	<u>Miya</u>
16a	Date of Signature	<u>June</u>	<u>2</u> <u>2000</u>
		Month	Day Year
17a	Residence	<u>Kawasaki-shi</u>	<u>Kanagawa</u> <u>JAPAN</u>
		City	State or Province Country
18a	Citizenship	<u>JAPAN</u>	
19a	Post Office Address (Insert complete mailing address, including country)	<u>1132-22, Kamiasao, Asao-ku,</u> <u>Kawasaki-shi, Kanagawa 215-0021 JAPAN</u>	
14b	Typewritten Full Name of Sole or First Inventor	<u>Satoshi</u>	<u>IMAIZUMI</u>
		Given Name	Middle Name Family Name
15b	Inventor's Signature	<u>Satoshi</u>	<u>Imaizumi</u>
16b	Date of Signature	<u>June</u>	<u>2</u> <u>2000</u>
		Month	Day Year
17b	Residence	<u>Yokosuka-shi</u>	<u>Kanagawa</u> <u>JAPAN</u>
		City	State or Province Country
18b	Citizenship	<u>JAPAN</u>	
19b	Post Office Address (Insert complete mailing address, including country)	<u>2-3-15-A101, Kurihama,</u> <u>Yokosuka-shi, Kanagawa 239-0831 JAPAN</u>	
14c	Typewritten Full Name of Sole or First Inventor	Given Name	Middle Name Family Name
15c	Inventor's Signature		
16c	Date of Signature	Month	Day Year
17c	Residence	City	State or Province Country
18c	Citizenship		
19c	Post Office Address (Insert complete mailing address, including country)		
14d	Typewritten Full Name of Sole or First Inventor	Given Name	Middle Name Family Name
15d	Inventor's Signature		
16d	Date of Signature	Month	Day Year
17d	Residence	City	State or Province Country
18d	Citizenship		
19d	Post Office Address (Insert complete mailing address, including country)		

\*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.